




## SSFHCP

## 規格 Specifications

精度等級 Precision grade	JIS 6級 DIN 10 e 27	齒面硬度 Tooth hardness	50~55HRC
齒 型 Gear teeth	直 齒 Straight	表面處理 Surface treatment	精 切 削 Finish cutting
壓力角 Pressure angle	20°	齒面處理 Treatment of Tooth	精 切 削 Finish cutting
材 質 Material	S45C	熱處理 Heat treatment	齒面高週波熱處理 Tooth surface induction hardened

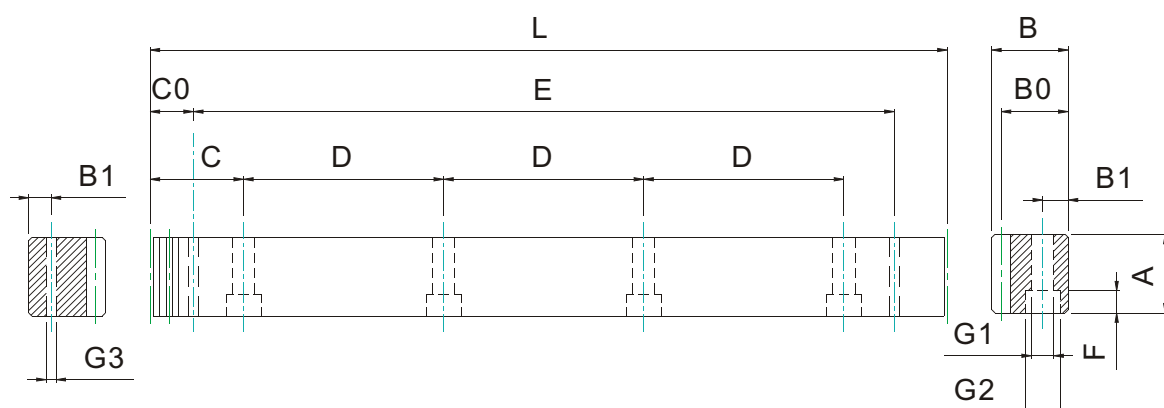

單位 / Dimension : mm

產品型號 Catalog No.	L	齒數 Tooth No.	A	B	B0	C	D	孔數 Hole No.	B1	G1	G2	F	C0	E	G3	總齒距誤差 Pitch Error /300mm
SSFHCP5-05	500	100	20	20	18.41	62.5	125	4	8	7	11	7	35	430	5.7	0.085
SSFHCP5-10	1000	200	20	20	18.41	62.5	125	8	8	7	11	7	35	930	5.7	0.085
SSFHCP8-05	504	63	25	25	22.46	64.5	125	4	12	7	11	7	35	434	5.7	0.086
SSFHCP8-10	1008	126	25	25	22.46	64.5	125	8	12	7	11	7	35	938	5.7	0.086
SSFHCP10-05	500	50	30	30	26.81	62.5	125	4	12	10	15	9	35	430	7.7	0.091
SSFHCP10-10	1000	100	30	30	26.81	62.5	125	8	12	10	15	9	35	930	7.7	0.091
SSFHCP12-05	504	42	40	40	36.19	64.5	125	4	18	10	15	9	35	343	7.7	0.095
SSFHCP12-10	1008	84	40	40	36.19	64.5	125	8	18	10	15	9	35	938	7.7	0.095
SSFHCP16-05	496	31	50	50	44.91	64.5	125	4	22	14	20	13	35	426	11.1	0.098
SSFHCP16-10	1008	63	50	50	44.91	64.5	125	8	22	14	20	13	35	938	11.1	0.098
SSFHCP20-05	504	25	60	60	53.64	62.5	125	4	26	18	26	17	35	430	15.7	0.100
SSFHCP20-10	1000	50	60	60	53.64	62.5	125	8	26	18	26	17	35	930	15.7	0.100
SSFHCP25-05	500	20	80	80	72.05	62.5	125	4	36	22	33	21	120	260	19.7	0.105
SSFHCP10-10	1000	40	80	80	72.05	62.5	125	8	36	22	33	21	120	760	19.7	0.105